
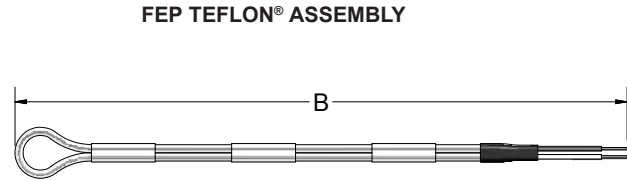


The thermocouples listed below are designed for a broad range of uses in applications that require resistance to corrosion and chemical attack. They provide very good temperature measurement and service life in plating, pickling, and acid bath applications. The Teflon® assemblies provide excellent resistance to strong acids, alkalines, and saline solutions.

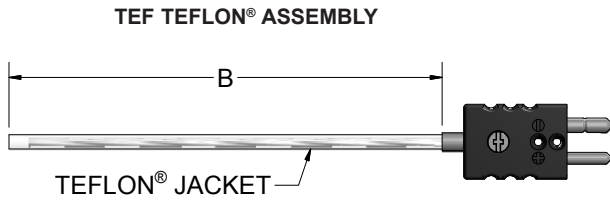

ORDER CODES

Example Order Number:

1-1 1-2 2 3
J4 TEF - 072 - 4, RB

1-1 Thermocouple Type

| CODE | DESCRIPTION |
|------|-------------|
| J4 | Type J |
| K4 | Type K |
| T4 | Type T |

2 Length

3 Digit "B" Length in Inches.

1-2 Outer Tubing

| CODE | DESCRIPTION | TEMPERATURE RATING |
|------|-------------|--------------------|
| TEF | Teflon® | 260 °C [500 °F] |
| FEP | Teflon® | 200 °C [392 °F] |

3 Terminations

| CODE | DESCRIPTION |
|---------|--------------------------------|
| 2 | 2" split leads, 1/4" stripped |
| 3 | 2" split leads with spade lugs |
| 4 | Standard plug |
| 5 | Standard jack |
| 6 | Miniature plug |
| 7 | Miniature jack |
| Options | |
| MC | Mating connector |
| CG | Cord grip (1/2" NPT PVC) |
| RB | Rubber boot |
| SP | Solid pin plug |

Teflon® is a registered trademark of E. I. du Pont de Nemours and Company.